

Attachment 7

The Northern Appalachian Coal Basin

The Northern Appalachian Coal Basin is the northernmost of the three basins comprising the Appalachian Coal Region of the eastern United States, and includes parts of the states of Pennsylvania, West Virginia, Ohio, Kentucky, and Maryland (Figure A7-1). The basin trends northeast-southwest and the Rome Trough, a major graben structure, forms the southeastern and southern structural boundaries (Kelafant et al., 1988). The basin is bounded on the northeast, north, and west by outcropping Pennsylvanian aged sediments (Kelafant et al., 1988). The Northern Appalachian Coal Basin lies completely within the Appalachian Plateau geomorphic province and contains relatively horizontal and undeformed strata, except for some broad, northeast-southwest trending anticlines and synclines (Figure A7-2) (Kelafant et al., 1988). It covers an area of approximately 30,300 square miles, consists of six Pennsylvanian age coal groups, and contains an estimated 61 trillion cubic feet of coalbed methane (Kelafant et al., 1988). Coal seam depths range from surface outcrops to up to 2,000 feet below ground surface, with most coal occurring at depths shallower than 1,000 feet (Quarterly Review, 1993). Annual coalbed methane production stood at 1.41 billion cubic feet in 2000 (GTI, 2002).

7.1 Basin Geology

The six Pennsylvanian aged coal groups comprising the Northern Appalachian Coal Basin are the Brookville-Clarion, Kittanning, Freeport, Pittsburgh, Sewickley, and the Waynesburg. These coal groups are contained within the Pottsville, Allegheny, Conemaugh, and the Monongahela Groups (Figure A7-3) (Kelafant et al., 1988).

In the Northern Appalachian Basin, the Pottsville stratigraphic group is generally 200 to 300 feet thick, and thins to the north and west into Ohio and Pennsylvania (Kelafant et al., 1988). The coals in this group are interbedded with fluvial and deltaic sands and shales and are capped by marine limestones and shales (Kelafant et al., 1988). Deposition of this group took place on irregular Mississippian terrain, forming thin and erratic coals (Kelafant et al., 1988).

The Allegheny Group reaches a maximum thickness of 200 to 300 feet in western Maryland and thins westward to about 150 to 200 feet in Ohio. Deposition of this group occurred as cyclothem type sedimentation, resulting in a complex sequence of lenticular, thin- to massive-bedded subgraywacke, shale, and mudstone interbedded with clays and coal (Kelafant et al., 1988). Due to their alluvial and delta plain depositional environments, Allegheny coals, which include the Brookville/Clarion, Kittanning, and the Freeport, are two to six feet thick and aerially extensive (Kelafant et al., 1988). The coalbeds decrease in number from the eastern to the western edge of the basin (Kelafant et al., 1988).

The Conemaugh Group is characterized by marine transgression and cyclothem development, with the last major marine transgression marked by the Ames Limestone, a

Pennsylvanian stratigraphic marker bed (Kelafant et al., 1988). The group is approximately 850 feet thick at the Maryland/West Virginia border and thins to the southwest to approximately 350 feet thick in outcrops in Wayne County, West Virginia. Rock types included in the Conemaugh Group are predominately shales and mudstones containing limestones, graywackes, and thin, discontinuous coals (Kelafant et al., 1988).

The Monongahela Group was deposited primarily in lacustrine and swamp environments. Some of the most important economic coals of the basin were deposited in large lakes, such as the Pittsburgh and Sewickley coals (Kelafant et al., 1988). The Monongahela Group is thickest (400 feet) along the Monongahela River and thins (250 feet) to the southwest along the Ohio River. Shales, mudstones, and freshwater limestones are the major rock types of the Group (Kelafant et al., 1988). The Waynesburg coals are also contained within the Monongahela Group. In general, the coalbeds of the Monongahela Group are laterally extensive.

The total thickness of the Pennsylvanian-aged coal system averages 25 feet; however, better-developed seams within the coal groups can increase in thickness by up to twice the average (Quarterly Review, 1993). Within the Pennsylvanian Coal System, the deepest coal group, The Brookville-Clarion, ranges in depth from surface exposures in anticlines to 2,000 feet below the ground surface. The Kittanning Group reaches a maximum depth of 2,000 feet and is approximately 800 feet deep in more than half the area in which the group occurs. The distance between the Upper and Lower Kittanning is approximately 100 feet (Kelafant et al., 1988). Freeport coals are at a maximum depth of 1,800 feet in the central portion of the Northern Appalachian Coal Basin. The Upper and Lower Freeport are separated laterally by a distance of 40 to 60 feet (Kelafant et al., 1988). The Pittsburgh coals achieve a maximum depth of 1,200 feet and roughly half of the coals can be found at depths greater than 400 feet (Kelafant et al., 1988). Sewickley coals are deeper than 400 feet with the deepest located at 1,200 feet below the ground surface (Kelafant et al., 1988). The final and youngest group discussed here, the Waynesburg group, is the shallowest, reaching a maximum depth of 800 feet in the center of the basin. Figures A7-4 through A7-9 (adapted from Kelafant et al., 1988) are isopach maps of sediment cover for the six major coal groups of the Appalachian Coal Basin.

7.2 Basin Hydrology and USDW Identification

The Northern Appalachian Basin is situated in the Appalachian Plateaus physiographic province of the region. The primary aquifer in this area is a Pennsylvanian sandstone aquifer underlain by limestone aquifers (National Water Summary, 1984). Water wells are typically 75 to 100 feet in depth in the Pennsylvanian aquifer and commonly produce one to five gallons per minute of water (National Water Summary, 1984). The primary aquifers in the Maryland portion of the basin are Appalachian sedimentary aquifers, which are mostly sandstones, shales, and siltstones with some limestone, dolomite, and coal. Water wells here are typically 30 to 400 feet in depth and usually produce 10 to 100 gallons per minute of water (National Water Summary, 1984).

In Ohio, the primary aquifers are sandstone aquifers, shaly sandstone and carbonate aquifers, and coarse-grained aquifers (comprised of alluvium and glacial outwash) associated with river valleys (National Water Summary, 1984). Water wells within these aquifers typically range from 25 to 300 feet in depth, and common water production rates vary between 1 and 500 gallons per minute (National Water Summary, 1984).

In Pennsylvania, the primary aquifers are sandstone and shale aquifers, with smaller unconsolidated sand and gravel aquifers surrounding river courses (National Water Summary, 1984). Well depths in the sandstone and shale aquifers in Pennsylvania are usually 80 to 200 feet in depth, and the wells typically produce five to 60 gallons per minute of water (National Water Summary, 1984).

In West Virginia, the primary aquifer in this area is an Upper Pennsylvanian-aged aquifer consisting of the Dunkard, Monongahela, and Conemaugh Groups (National Water Summary, 1984). This aquifer consists of nearly horizontal beds of shale, sandstone, siltstone, coal, and limestone (National Water Summary, 1984). Water wells typically extend from 50 to 300 feet in depth in this area of West Virginia, and commonly produce one to 30 gallons per minute of water (National Water Summary, 1984).

Individual states containing portions of the basin have developed various maps and documents locating USDWs and aquifers within their state boundaries, mostly as a part of their respective Underground Injection Control (UIC) Programs. The Environmental Protection Agency (EPA) Regional Office also has information concerning the location of these resources, as not all states within the Northern Appalachian Coal Basin have primacy over their UIC Program. Water quality data from eight historic Northern Appalachian Coal Basin projects show that estimated Total Dissolved Solids (TDS) levels ranged from 2,000 to 5,000 milligrams per liter at depths ranging from 500 to 1025 feet below ground surface (Zebrowitz et al., 1991), well within the EPA's standard of 10,000 mg/L of total dissolved solids (TDS) for a USDW (40 CFR §144.3).

Most states (Kentucky, Ohio, and West Virginia) within the Northern Appalachian Basin have mapped the interface between saline and freshwater aquifers. For the remaining states (Maryland and Pennsylvania), no maps have been identified that define the interface between saline and freshwater aquifers. In Maryland, a deep well drilled in southern Garrett County encountered the fresh/saltwater interface at a depth of 940 feet (Duigon and Smigaj, 1985). Ground water in Pennsylvania deeper than 450 feet is not considered to be a USDW (Platt, USEPA Region 3, personal communication 2001) because of the existence of non-water producing shale from 450 to 1000 feet, and TDS levels in water below this shale that are typically greater than 100,000 mg/L. The following table contains information concerning the relative location of potential USDWs and potential methane-bearing coalbeds in the Northern Appalachian Coal Basin.

Table 7-1. Relative Locations of USDWs and Methane-Bearing Coalbeds

Northern Appalachian Coal Basin, States and Coal Groups	Pennsylvania		West Virginia		Ohio		Kentucky		Maryland	
	Depth to top of Coal (ft)	Depth to Base ³ of Fresh Water (ft)	Depth to top of Coal ² (ft)	Depth to Base ⁴ of Fresh Water ¹ (ft)	Depth to top of Coal ² (ft)	Depth to Base ⁶ of Fresh Water ¹ (ft)	Depth to top of Coal ² (ft)	Depth to Base ⁵ of Fresh Water <1,000 mg/L TDS (ft)	Depth to top of Coal ² (ft)	Depth to Base ⁷ of Fresh Water ¹ (ft)
Waynesburg	0 to 800	~ 450	0 to 800	~ 150 to 500	0 to 400	~ 100 to 500	0 to <400	~ 100 to 500	0 to <400	~ 940
Sewickly	0 to 1200		0 to 1200		0 to < 800		0 to <400		0 to <400	
Pittsburgh	0 to 1200		0 to 1200		0 to 800		0 to <400		0 to <400	
Freeport	0 to 1600		0 to 1600		0 to <1200		0 to <400		0 to <400	
Kittanning	0 to 2000		0 to 2000		0 to <1200		0 to <400		0 to <400	
Brookville/Clarion	<400 to 2000		<400 to 2000		< 400 to 1200		<800		<800	

¹ Note: The base of "fresh water" is not necessarily the base of the USDW. Fresh water is within the USDW and the base of fresh water is above the base of the USDW. "Fresh water" is water with <1000 mg/L TDS.

² Kelafant et al., 1988

³ Platt, USEPA Region 3, personal communication 2001

⁴ Foster, 1980

⁵ Hopkins, 1966 and USGS, 1973

⁶ Sedam and Stein, 1970 and USGS, 1971

⁷ Duigon, 1985

As shown in Table 7-1, coalbeds with methane production potential in the Northern Appalachian Basin do occur within USDWs, indicating the potential for impact. West Virginia's interface line between fresh and saline water (Foster, 1980) is based on a qualitative assessment, Ohio's is based on a TDS level of 3,000 mg/L (Sedam and Stein, 1970), and Kentucky's is based on a TDS level of 1,000 mg/L (Hopkins, 1966). In Maryland, the fresh water distinction was probably made based on a TDS level of 1,000 mg/L, as the reference refers to sodium and chloride concentrations of 1,800 mg/L and 2,900 mg/L as "high levels" (Duigon and Smigaj, 1985).

Therefore, in these states, the depth to the 10,000 mg/L level of TDS in ground water is potentially and likely deeper than the depths presented above (Table 10-1). This assumption is confirmed by a structure elevation map (Figure A7-6) of the Upper and Lower Freeport Sandstones of the Upper Allegheny Group (Figure A7-3) in Ohio. With the increasing depth of these stratigraphic units toward the basin center, much of the formation waters in these units south of the easternmost counties in Ohio contain TDS levels in excess of 10,000 mg/L (Vogel, 1982). Likewise, the Pittsburgh Group Coals in Pennsylvania range in depth from outcrop to 1,200 feet below the ground surface (Figure A7-7). Over this length of "dip," it is likely that the coals intersect drinking water aquifers before they reach depths where TDS levels exceed the 10,000 mg/L TDS water quality criterion of a USDW.

7.3 Coalbed Methane Production Activity

Coalbed methane has been produced in commercial quantities from the Pittsburgh coalbed of the Northern Appalachian Coal Basin since 1932 (Lyons, 1997), after the discovery of the Big Run Field in Wetzel County, West Virginia, in 1905 (Hunt and Steele, 1991). Coalbed methane production development in the Northern Appalachian Basin has lagged, however, due to insufficient reservoir knowledge, inadequate well completion techniques, and coalbed gas ownership issues revolving around whether the gas is owned by the mineral owner or the oil and gas owner (Zebrowitz et al., 1991). Annual coalbed methane production stood at 1.41 billion cubic feet in 2000 (GTI, 2002). Discharge of produced waters has also proven to be problematic (Lyons, 1997) for current and would-be coalbed methane field operators in the Northern Appalachian Coal Basin.

Some operators in the Northern Appalachian Coal Basin and several test projects are discussed below. As of 1993, O'Brien Methane Production, Inc. had at least 20 wells in southern Indiana County, Pennsylvania (Quarterly Review, 1993). They received a water treatment and discharge permit that allowed O'Brien to discharge produced water into Blacklick Creek. The wells in O'Brien's field were hydraulically fractured with water and sand, and nitrogen was being contemplated for future fracturing. O'Brien's operations have since been assumed by Belden and Blake. BTI Energy, Inc. also had a few coalbed wells in northern Fayette County, Pennsylvania. Two were complete in 1993 and the firm held permits for eight additional wells.

Other projects in the basin included the Lykes/Emerald Mines Project of the United States Bureau of Mines (USBM) and the Penn State University/Carnegie Natural Gas/U.S. Steel Wells Project, both in Greene County, Pennsylvania. Depths to the top of the Pittsburgh coals in Greene County range from 800 to 1,200 feet below ground surface (Kelafant et al., 1988). Hydraulic fracturing fluids included water and sand and nitrogen foam and sand (Hunt and Steele, 1991). The Christopher Coal Company/Spindler Wells Project, which took place from 1952 to 1959, fractured one well with 12 quarts of nitroglycerin (Hunt and Steele, 1991). In the Vesta Mines Project of Washington County, Pennsylvania, the USBM used gelled water and sand to complete five wells in the Pittsburgh Seam (Hunt and Steele, 1991).

There have been complaints within the state of Pennsylvania of methane migrating into water supplies (Markowski, PGS, personal communication 2001). During a telephone interview (Markowski, PGS, personal communication 2001), Ms. Markowski stated methane contamination is due to the fact that many coalbed methane wells in southwestern Pennsylvania are completed in abandoned mine shafts. A puncture in the roof of the mineshaft provides a migration pathway for methane into overlying ground water. These wells are known as gob wells, and are not usually hydraulically fractured nor stimulated.

7.4 Summary

Based on available information, coal seams with methane production potential are located within USDWs throughout the Northern Appalachian Coal Basin, and hydraulic fracturing takes place in this basin. Because most of the coal strata dip, a well's location within the basin determines whether it is within a USDW, and whether the potential for impact exists. For example, in the Pittsburgh Coal Group in Pennsylvania, the depth to the top of this coal group varies from outcrop to about 1,200 feet in the very southwestern corner of the state. The approximate depth to the bottom of the USDW is 450 feet. Therefore, production wells operating down to approximately 500 feet could potentially be hydraulically connected to the USDW. However, those wells operating at depths greater than 900 feet probably would not, unless a fracture extending beyond the coal layers to the shallower aquifer was to occur.

Milici (2002) claims that the Pittsburgh Coal Group in Pennsylvania is mined out along its outcrop and the remaining coal resources are deeper (> 450 feet) in the basin. While this situation would greatly minimize the possibility of water quality impacts for this coal group in Pennsylvania, the potential for contamination of other coal groups in other states within the basin still exists (see Table 7-1).

REFERENCES

- Duigon, Mark T. and Smigaj, Michael J. 1985. First report on the hydrologic effects of underground coal mining in Southern Garrett County, Maryland, U.S. Geological Survey Report of Investigations No. 41.
- Foster, James B. 1980. Fresh and saline ground-water map of West Virginia. U. S. Geological Survey, West Virginia Geological and Economic Survey, Map WV-12.
- Gas Technology Institute (GTI) website, 2002. Drilling and Production Statistics for Major US Coalbed Methane and Gas Shale Reservoirs.
<http://www.gastechnology.org>
- Hopkins, Herbert T. 1966. Fresh-saline water interface map of Kentucky. U.S. Geological Survey, Kentucky Geological Survey, Series X.
- Hunt, A. M., and Steele, D. J. 1991. Coalbed methane development in the Northern and Central Appalachian Basins – past, present and future. Proceedings of the 1991 Coalbed Methane Symposium, The University of Alabama/Tuscaloosa, May 13-16, 1991.
- Kelafant, J. R., Wicks, D. E., and Kuuskraa, V. A. March 1988. A Geologic Assessment of Natural Gas from Coal Seams in the Northern Appalachian Coal Basin. Topical Report – Final Geologic Report to the Gas Research Institute (September 1986 – September 1987).
- Lyons, Paul C. 1997. Central-Northern Appalachian Coalbed Methane Flow Grows. Oil & Gas July 7, 1997, pp. 76-79.
- Markowski, Toni. January, 2001. Pennsylvania Geological Survey, *personal communication*.
- Milici, R. C. February, 2002. U. S. Geological Survey, *personal communication*.
- National Water Summary. 1984. Hydrologic events, selected water-quality trends, and ground-water resources. United States Geological Survey Water-Supply Paper No. 2275.
- Platt, Steve. January, 2001. U.S. EPA Region 3, *personal communication*.
- Quarterly Review. 1993. Coalbed Methane – State of the Industry. Methane From Coal Seams Technology, August 1993.

Sedam, A. C., and Stein, R. B. 1970. Saline ground-water resources of Ohio. Hydrologic Investigations Atlas HA-366, Department of the Interior, U. S. Geological Survey.


United States Geological Survey. 1971. State of Ohio, 1:500,000 topographic map.

United States Geological Survey. 1973. State of Kentucky, 1:500,000 topographic map.


Vogel, Donald A. 1982. Final Report, U.I.C. Program, Salt/Fresh Water Interface Ground-Water Mapping Project. Ohio Dept. of Natural Resources, Division of Water, Columbus.

Zebrowitz, M. J., Kelafant, J. R., and Boyer, C. M. 1991. Reservoir characterization and production potential of the coal seams in Northern and Central Appalachian Basins. Proceedings of the 1991 Coalbed Methane Symposium, The University of Alabama/Tuscaloosa, May 13-16, 1991.

40 CFR § 144.3.

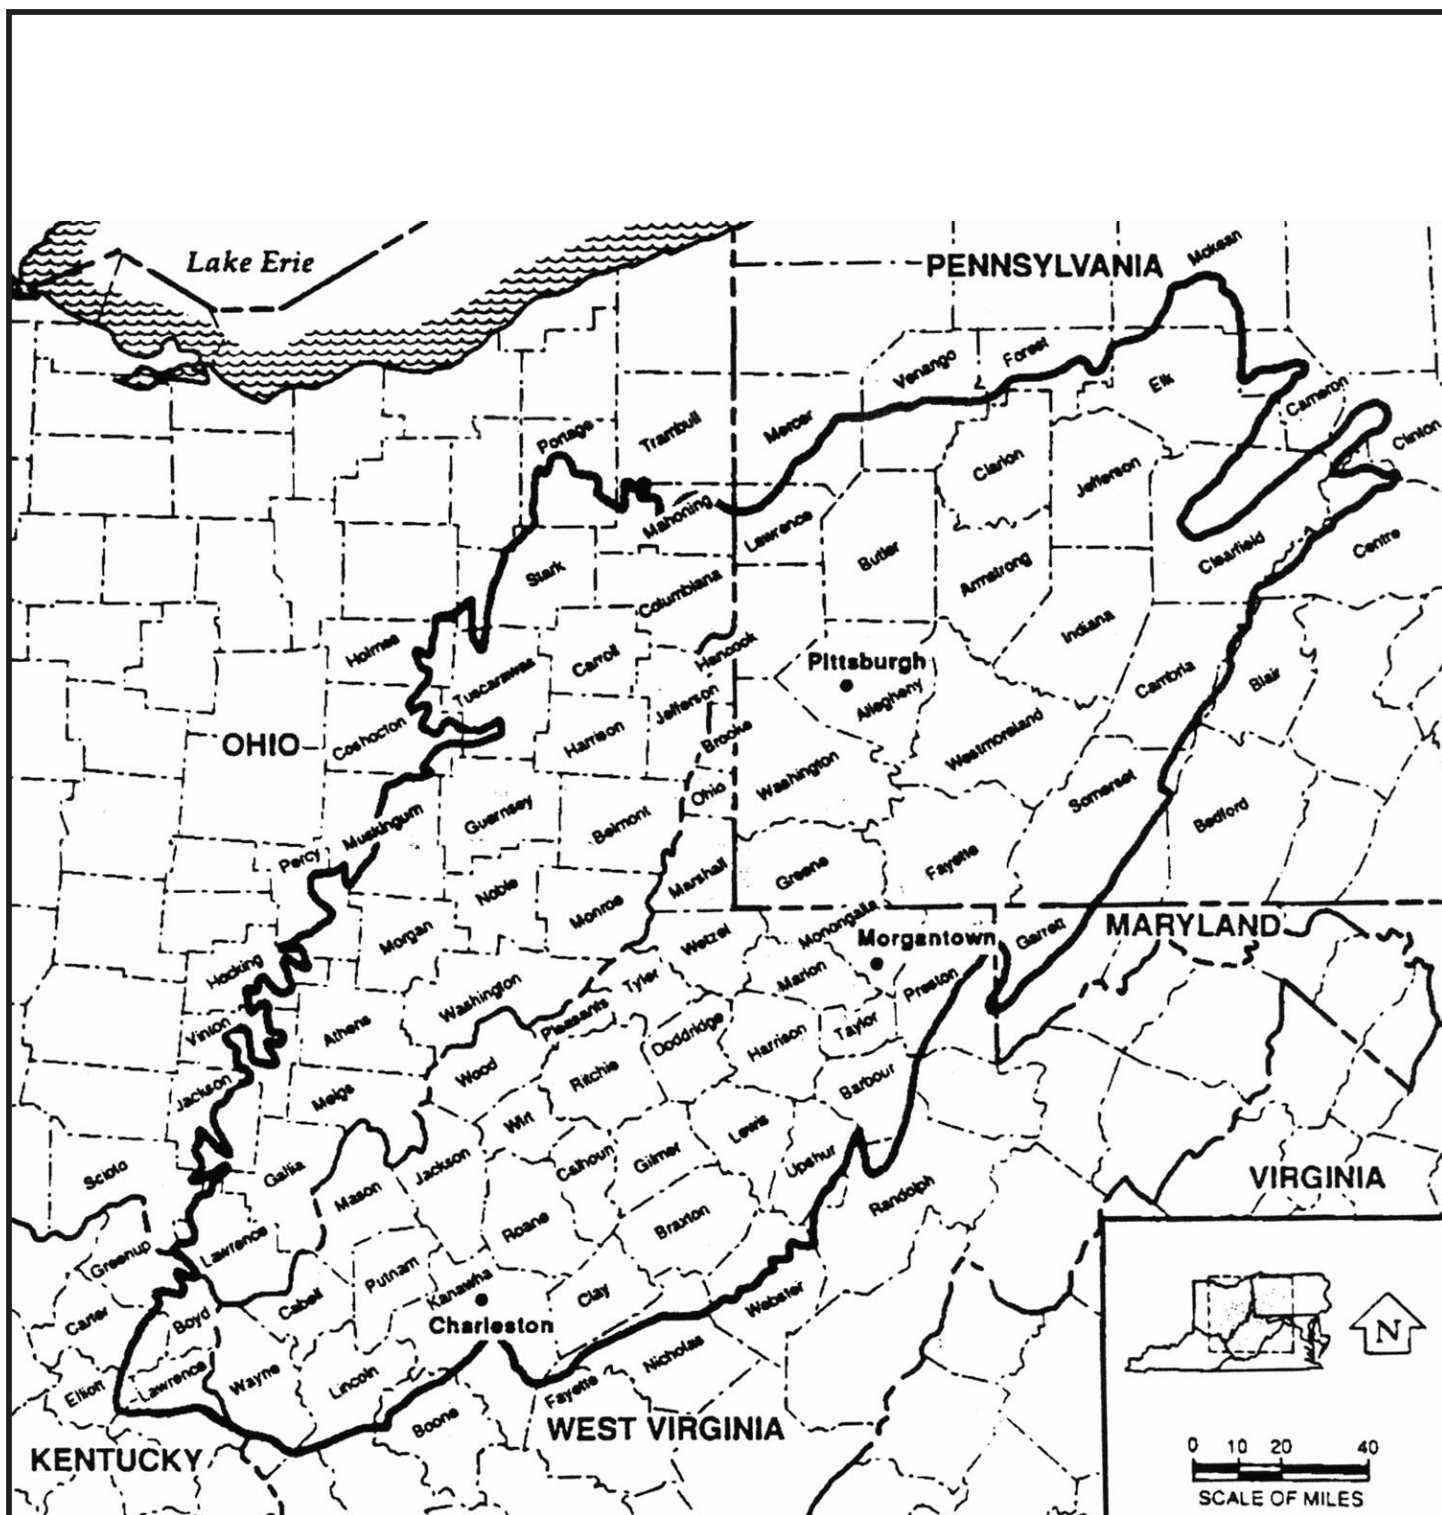


Index Map Showing County Names (Kelafant et al., 1988)

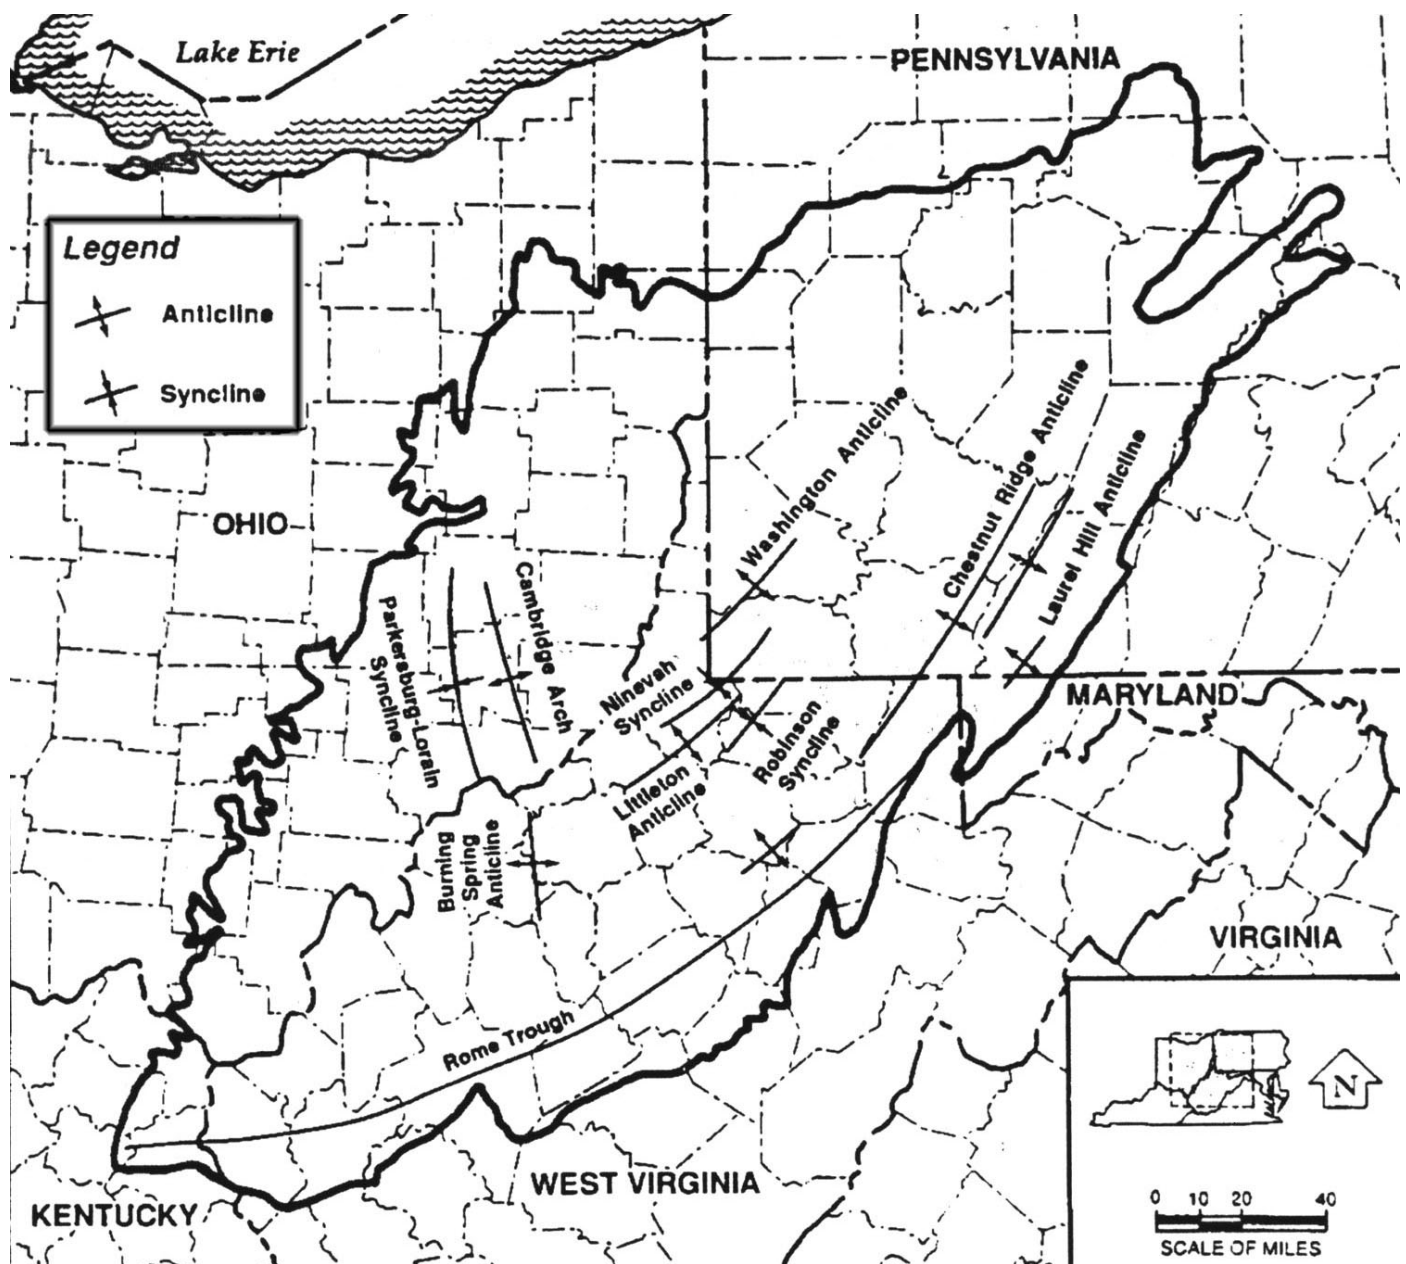


Structure Map (Kelafant et al., 1988)

System	Group	Coal Group
Permian	Dunkard	
Pennsylvanian	Monongahela	Waynesburg
		Sewickley
	Conemaugh	Pittsburgh
	Allegheny	Freeport
		Kittanning
	Pottsville	Brookville/Clarion


Generalized Stratigraphic Column of the Northern Appalachian Coal Basin
(Kelafant et al., 1988)

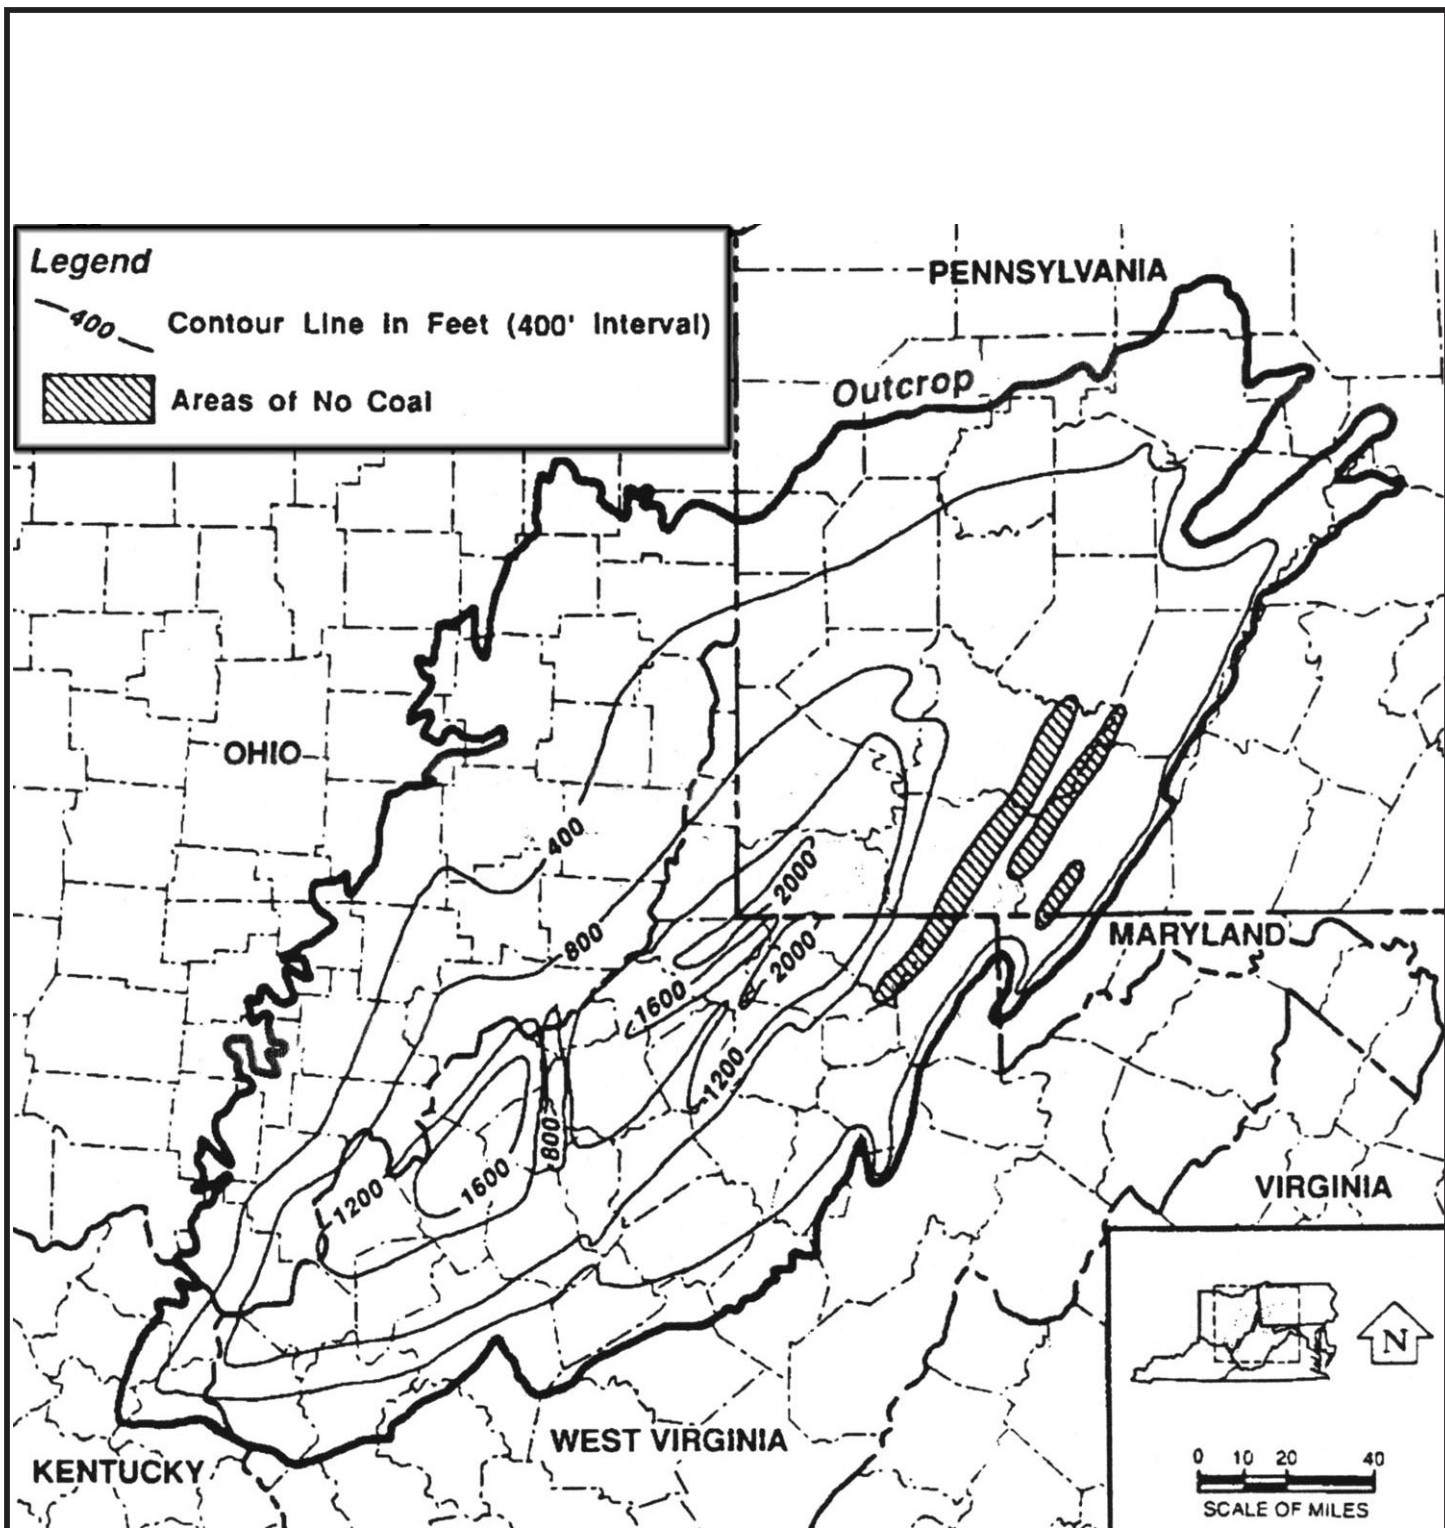


Isopach Map: Depth of Cover to the Brookville/Clarion Group Coals
(Kelafant et al., 1988)

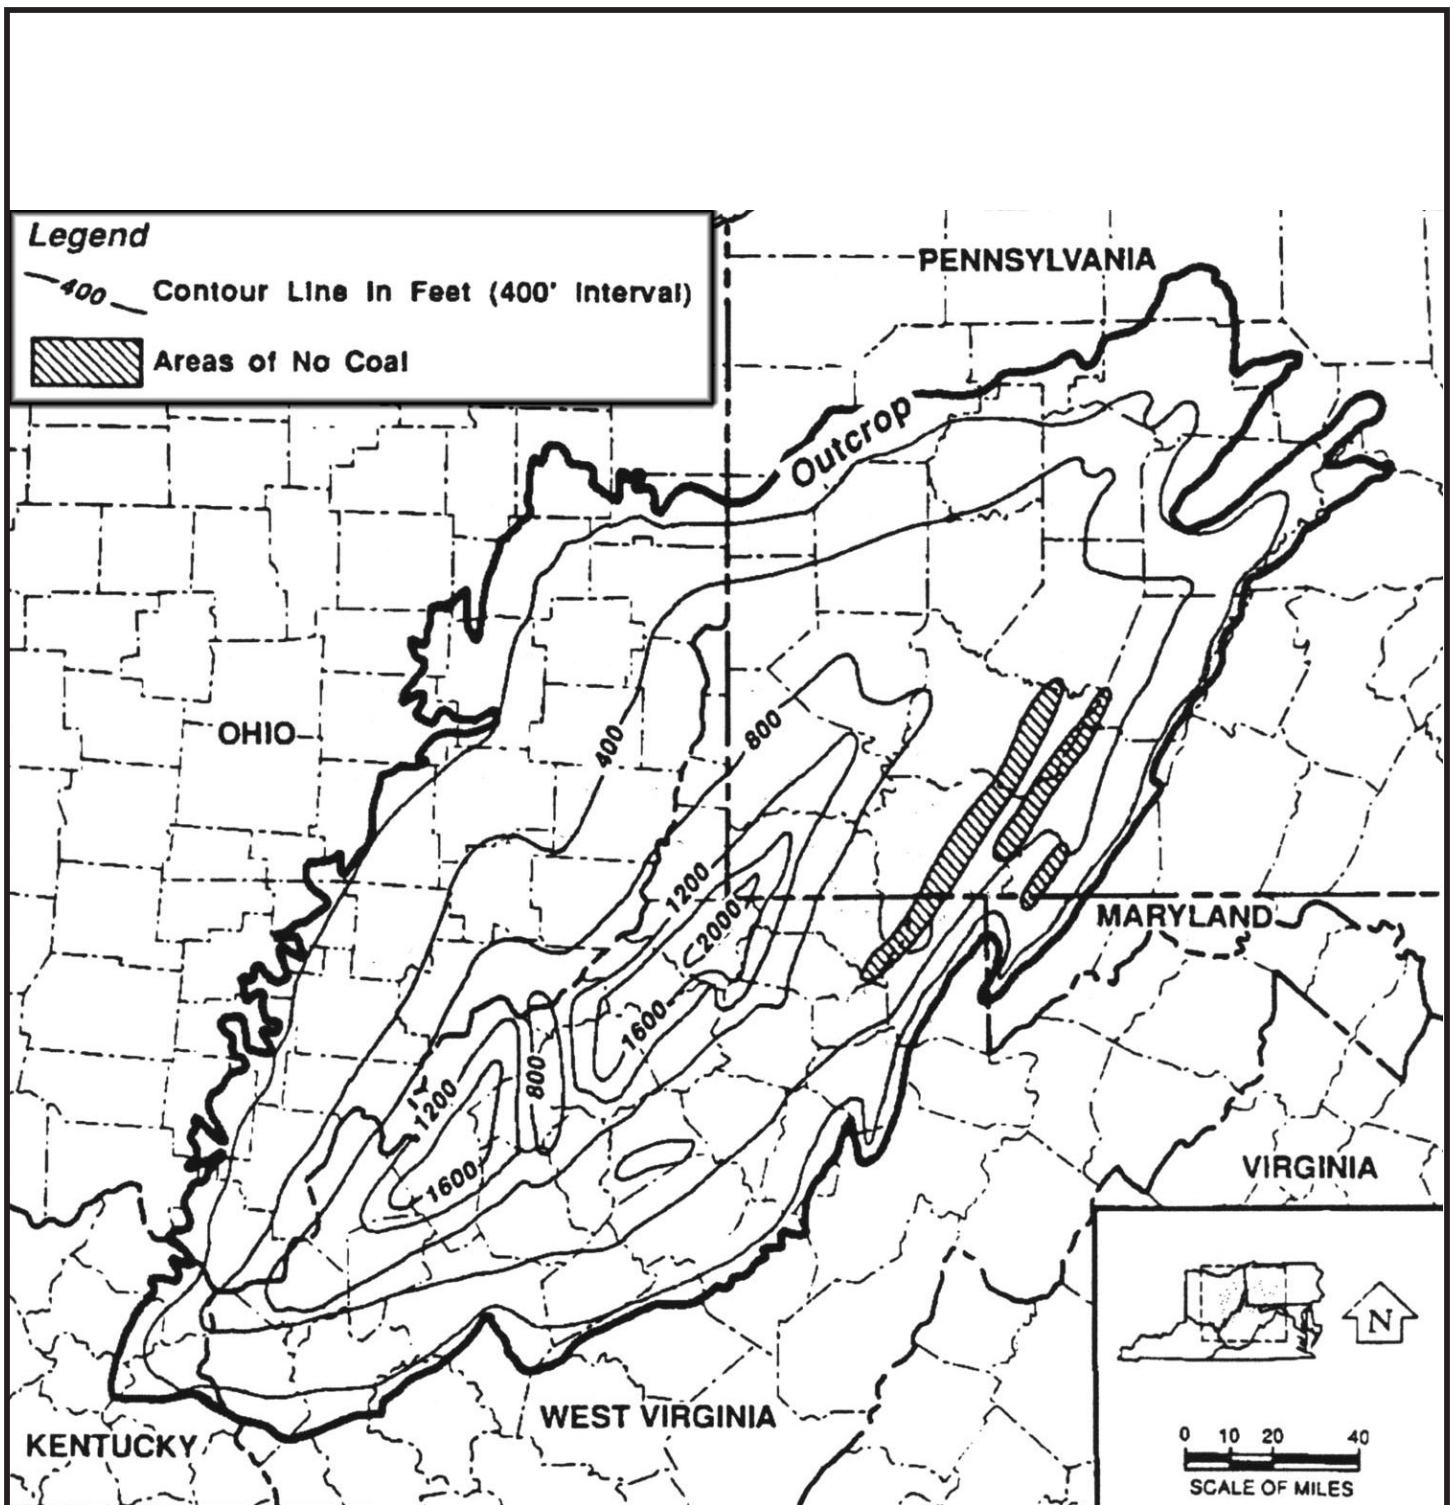


Isopach Map: Depth of Cover to the Kittanning Group Coals
(Kelafant et al., 1988)

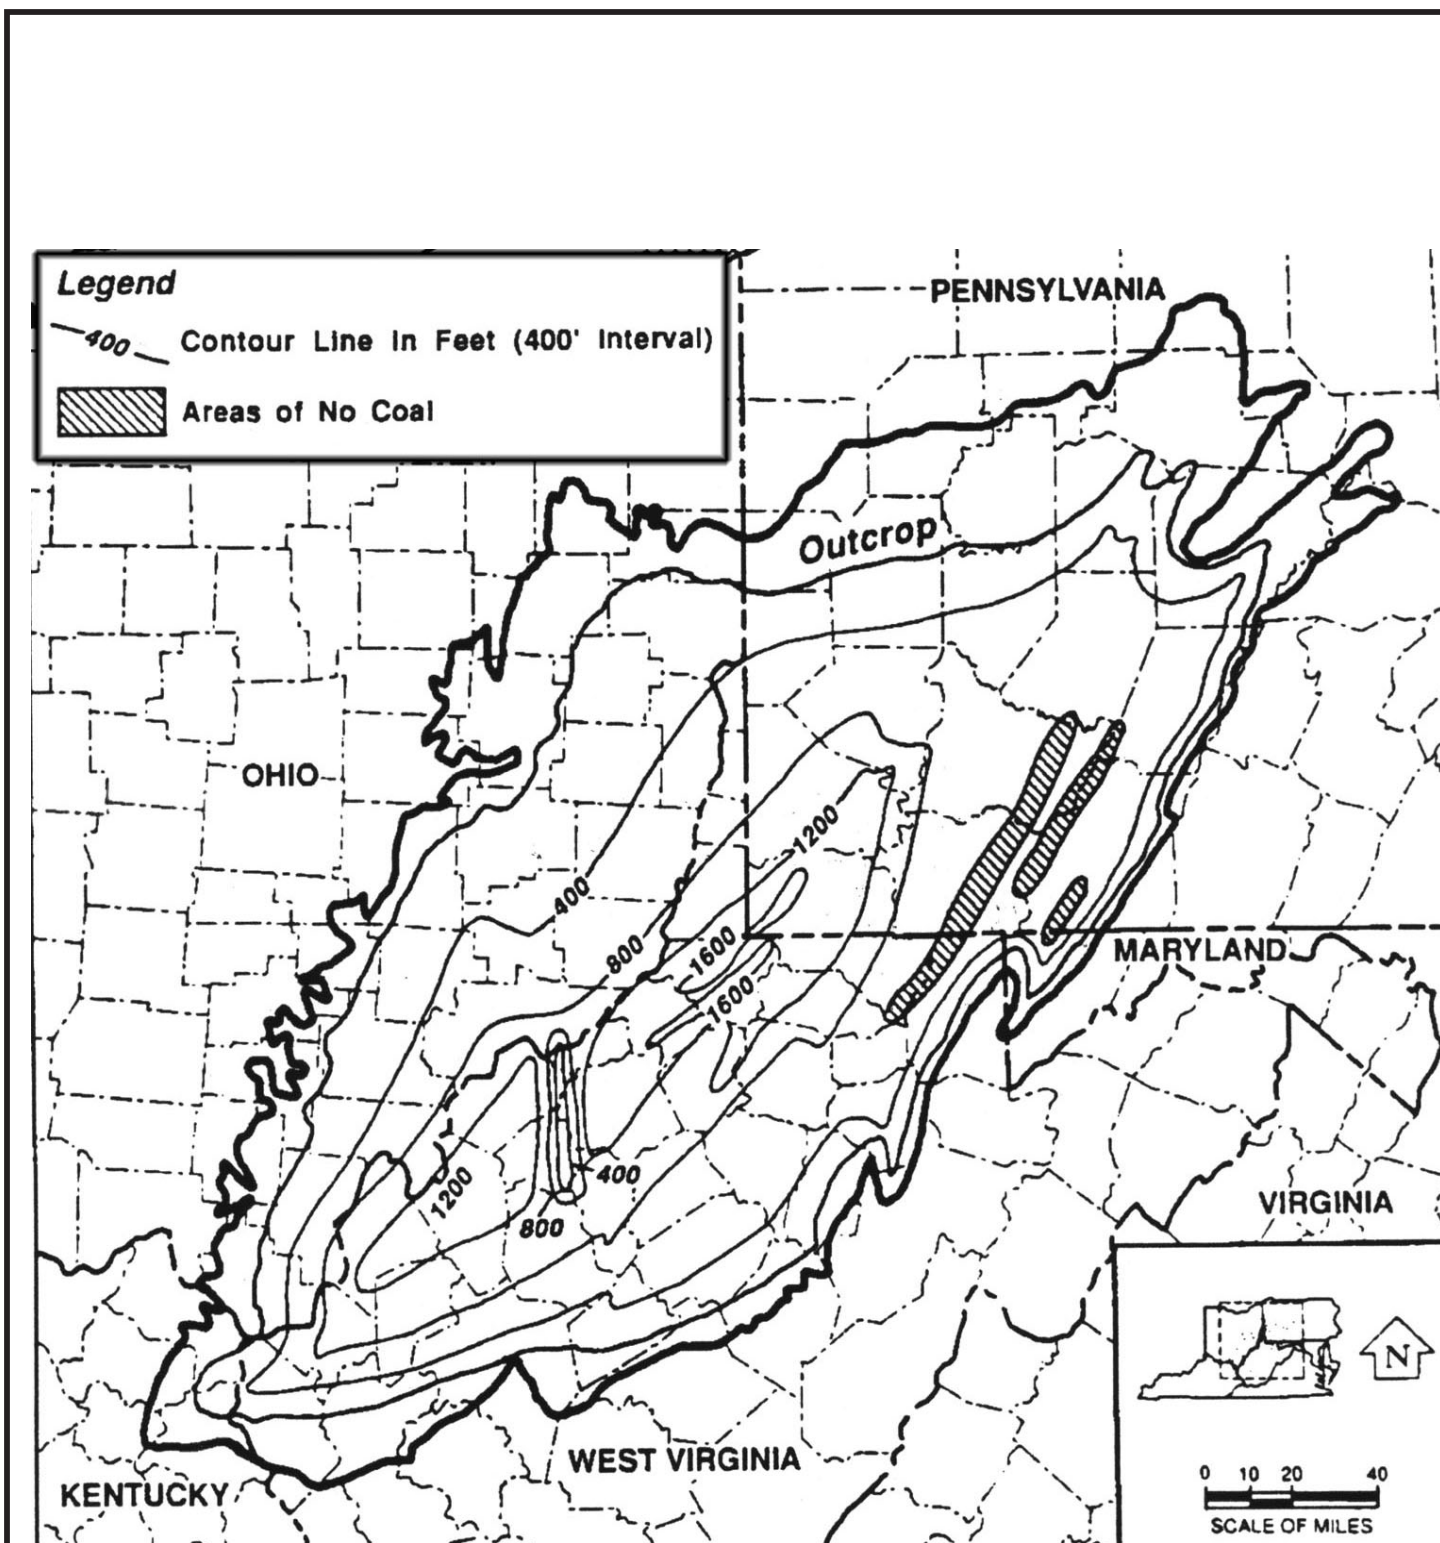


Isopach Map: Depth of Cover to the Freeport Group Coals
(Kelafant et al., 1988)

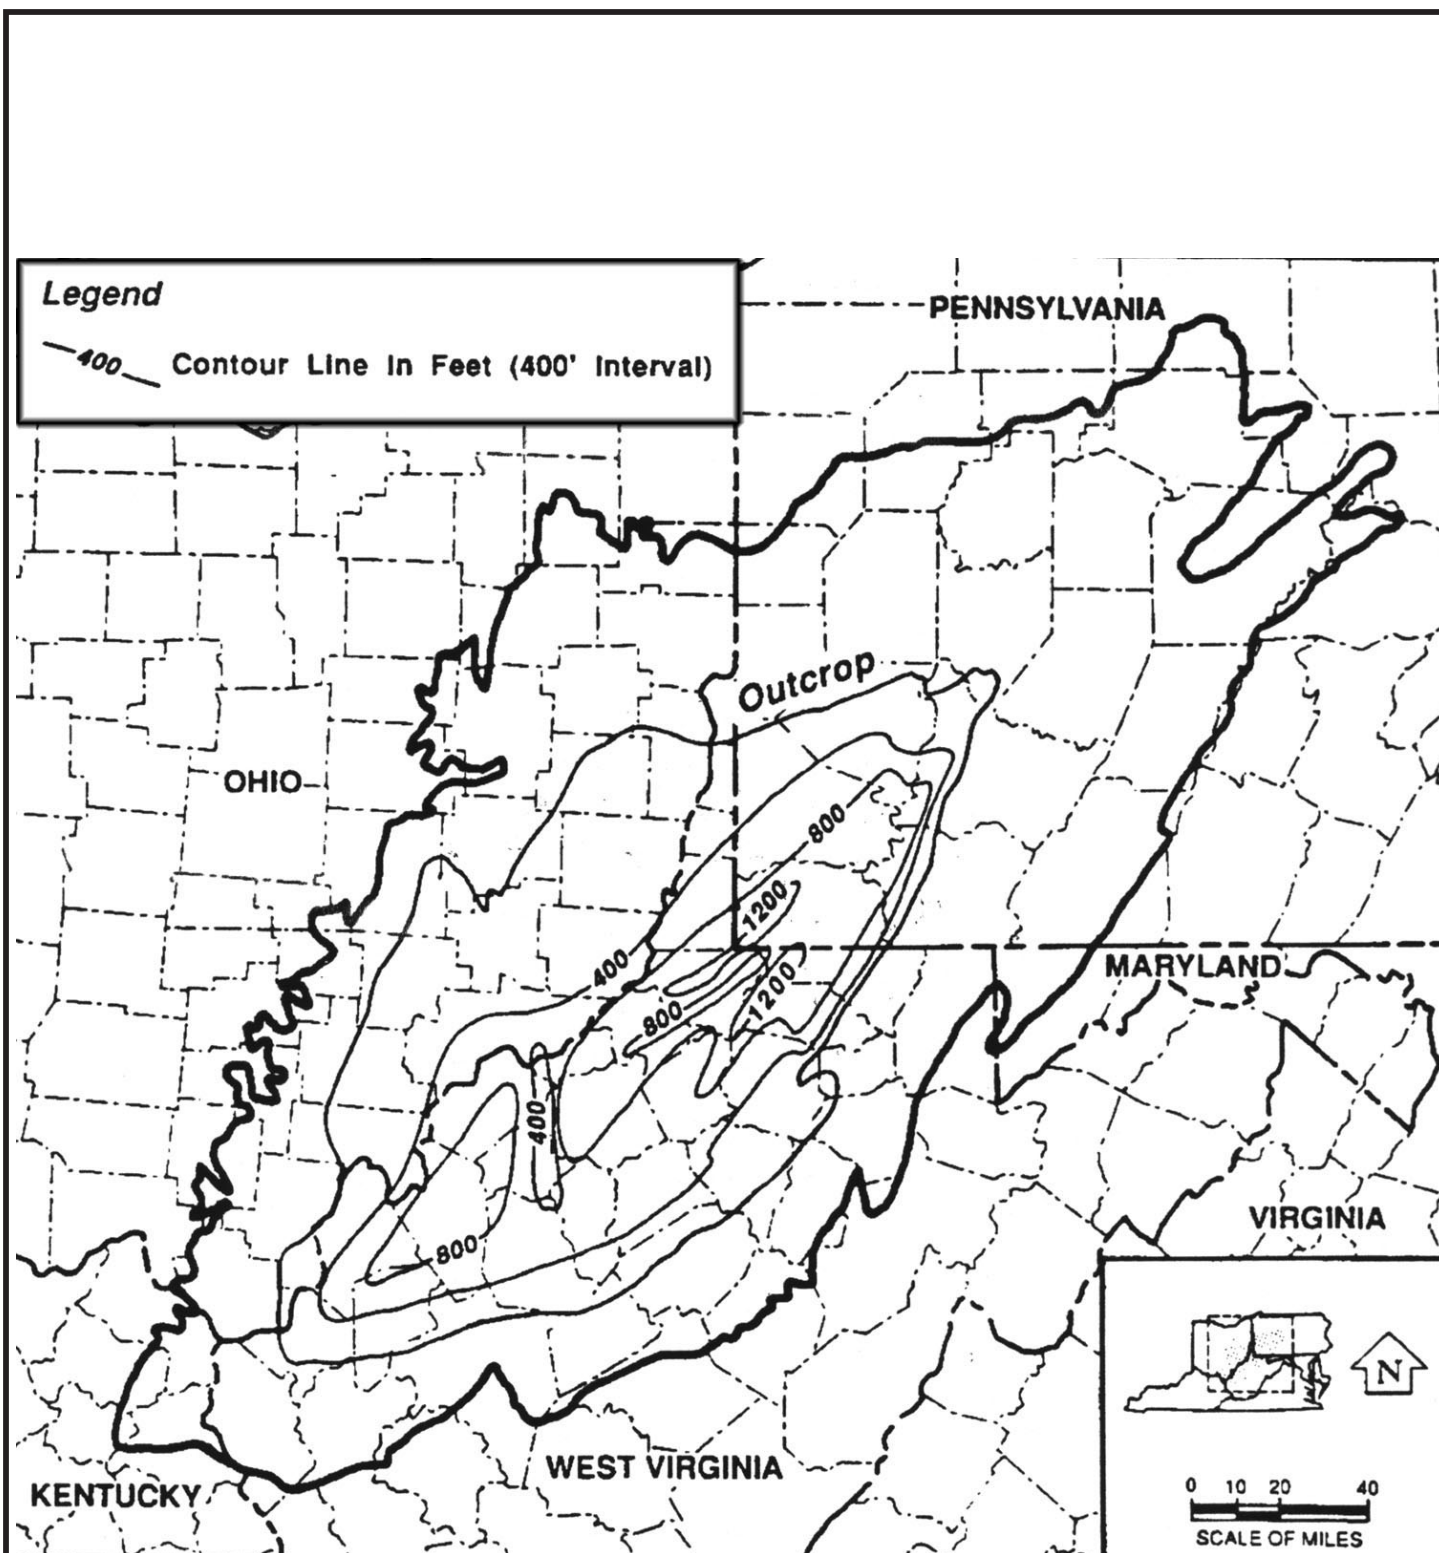

Isopach Map: Depth of Cover to the Pittsburgh Group Coals
(Kelafant et al., 1988)

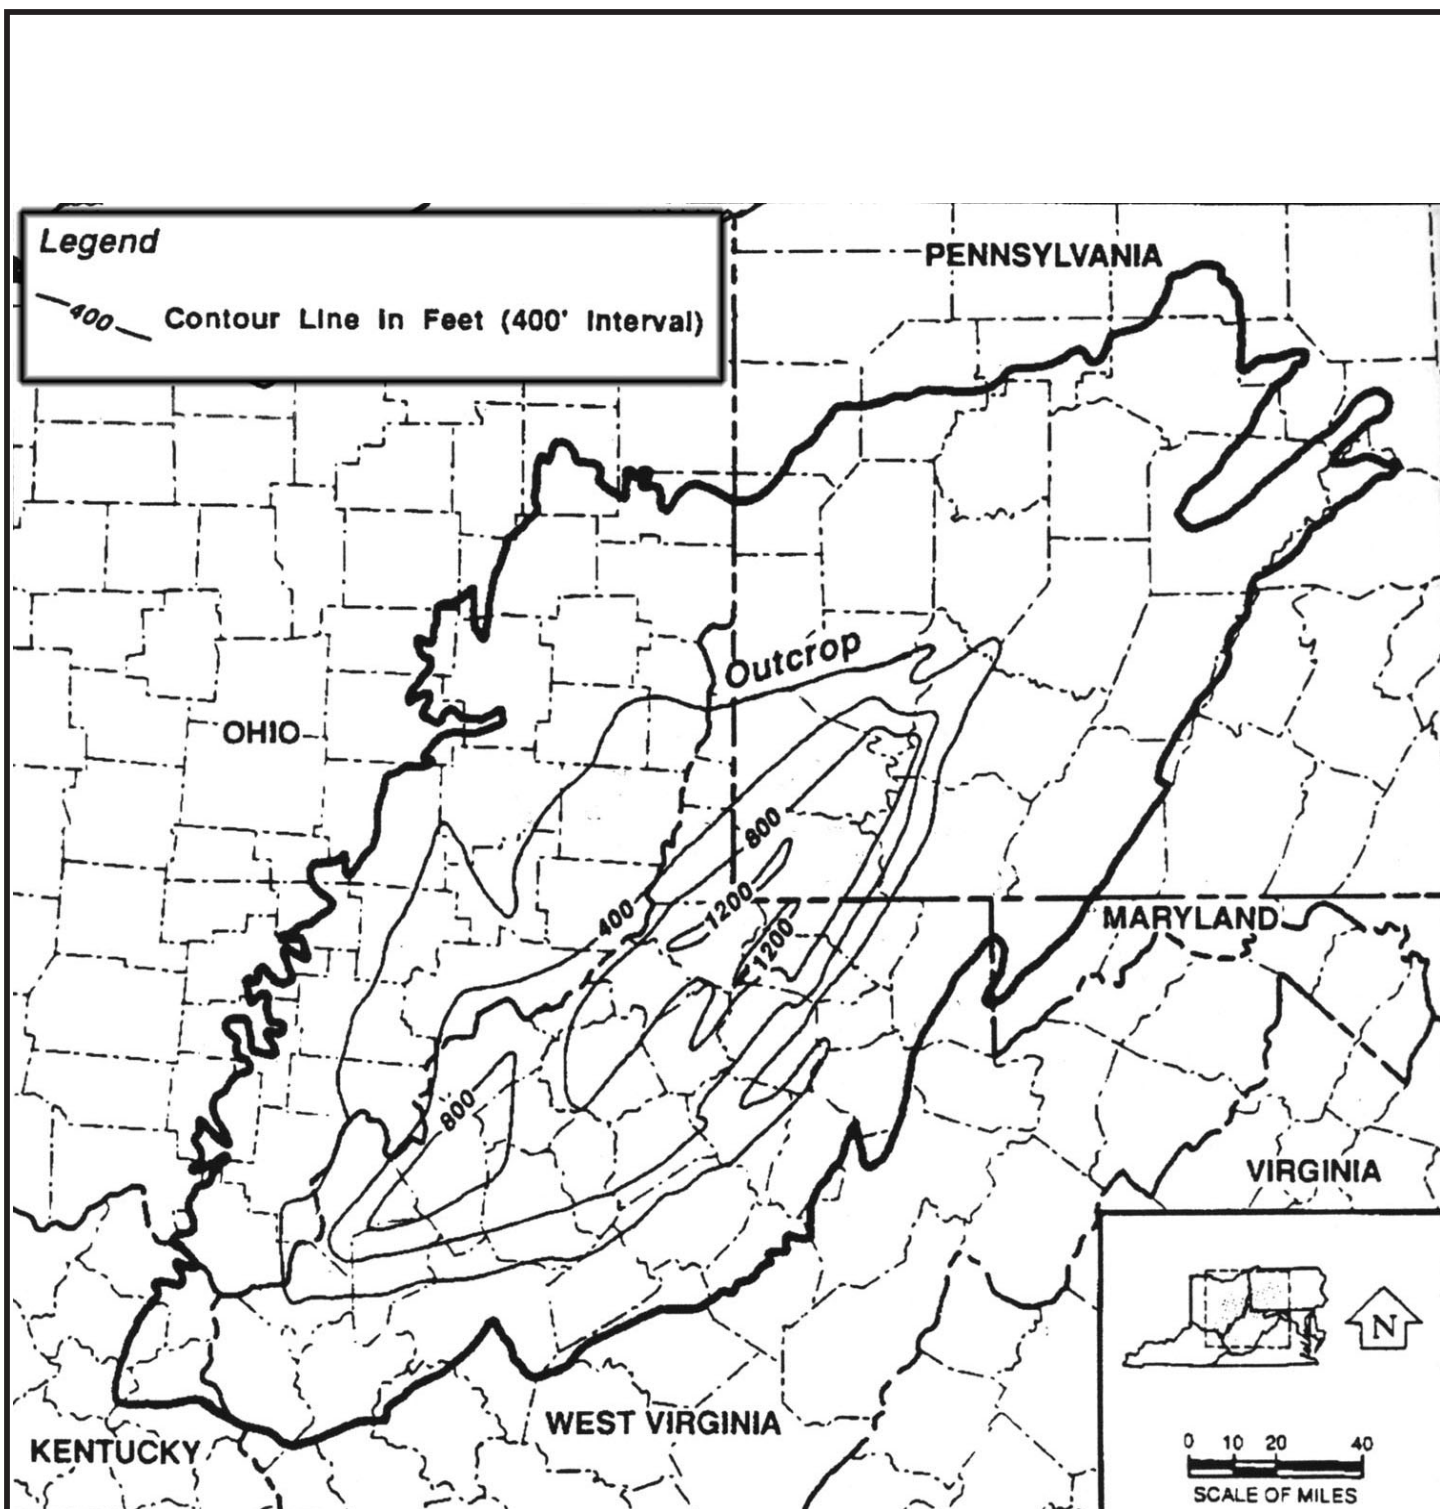

Isopach Map: Depth of Cover to the Sewickley Group Coals
(Kelafant et al., 1988)

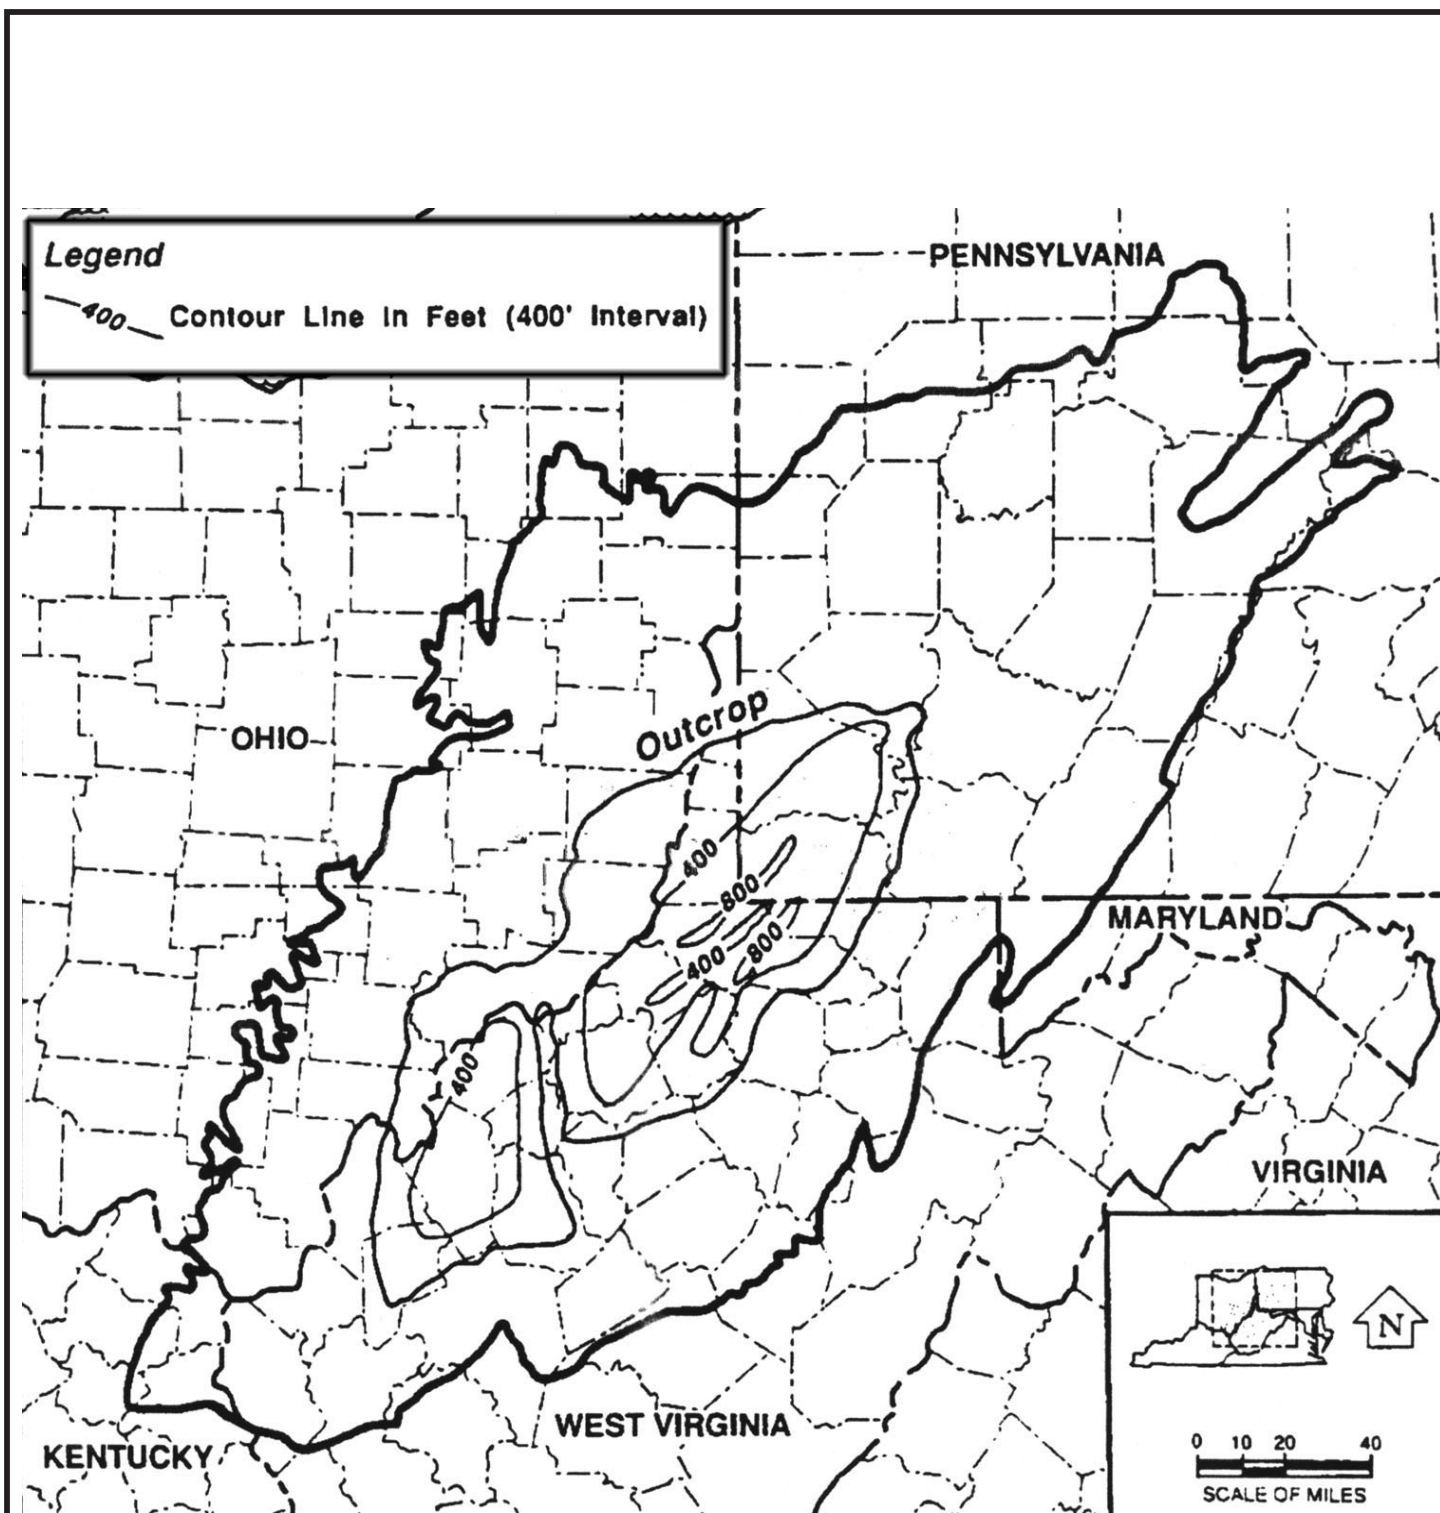

Isopach Map: Depth of Cover to the Waynesburg Group Coals
(Kelafant et al., 1988)